


Сверла с пластиной WCMX

Сверла с СМП общего назначения

Внутренний подвод СОЖ

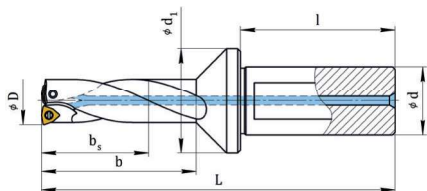

Обозначение	D	b	b _s	L	d	d ₁	l	МНП
Ø22,0...30,0								
111-22,0-25-044	22,0	75	44	139	25	35	56	WCMX 05...
111-23,0-25-046	23,0	75	46	139	25	35	56	
111-24,0-25-048	24,0	75	48	139	25	35	56	
111-25,0-25-050	25,0	75	50	139	25	35	56	
111-26,0-25-052	26,0	90	52	155	25	35	56	
111-27,0-25-054	27,0	90	54	155	25	35	56	
111-28,0-25-056	28,0	90	56	155	25	35	56	
111-29,0-25-058	29,0	90	58	155	25	35	56	
111-30,0-25-060	30,0	90	60	155	25	35	56	
Ø31,0...41,0								
112-31,0-32-062	31,0	105	62	175	32	45	60	WCMX 06...
112-32,0-32-064	32,0	105	64	175	32	45	60	
112-33,0-32-066	33,0	105	66	175	32	45	60	
112-34,0-32-068	34,0	105	68	175	32	45	60	
112-35,0-32-070	35,0	105	70	175	32	45	60	
112-36,0-32-072	36,0	105	72	175	32	45	60	
112-37,0-32-074	37,0	120	74	190	32	45	60	
112-38,0-32-076	38,0	120	76	190	32	45	60	
112-39,0-32-078	39,0	120	78	190	32	45	60	
112-40,0-32-080	40,0	120	80	190	32	45	60	
112-41,0-32-082	41,0	120	82	190	32	45	60	
Ø42,0...60,0								
113-42,0-40-084	42,0	135	84	215	40	50	70	WCMX 08...
113-43,0-40-086	43,0	135	86	215	40	50	70	
113-44,0-40-088	44,0	135	88	215	40	50	70	
113-45,0-40-090	45,0	135	90	215	40	50	70	
113-46,0-40-092	46,0	135	92	230	40	50	70	
113-47,0-40-094	47,0	135	94	230	40	50	70	
113-48,0-40-096	48,0	135	96	230	40	50	70	
113-49,0-40-098	49,0	165	98	230	40	50	70	
113-50,0-40-100	50,0	165	100	230	40	50	70	

Обозначение	D	b	b _s	L	d	d ₁	l	МНП
113-51,0-40-102	51,0	165	102	245	40	50	70	WCMX 08...
113-52,0-40-104	52,0	165	104	245	40	50	70	
113-53,0-40-106	53,0	165	106	245	40	50	70	
113-54,0-40-108	54,0	165	108	245	40	50	70	
113-55,0-40-110	55,0	165	110	245	40	50	70	
113-56,0-40-112	56,0	165	112	245	40	50	70	
113-57,0-40-114	57,0	165	114	245	40	50	70	
113-58,0-40-116	58,0	165	116	245	40	50	70	
113-59,0-40-118	59,0	165	118	245	40	50	70	
113-60,0-40-120	60,0	165	120	245	40	50	70	

ТУ 25.73.40-020-36293294-2017

Пластины

Схема	Обозначение	iC	a	s	a°	d ₁	r
	WCMX 050308	7,940	5,430	3,18	7	3,5	0,8
	WCMX 06T308	9,525	6,520	3,97	7	4,0	0,8
	WCMX 080412	12,700	8,690	4,76	7	4,4	1,2

Винты

Схема	Обозначение	d	L	Размер Torx
	SS-30080-MI	M4,0-5h	11	15 IP
	SS-35100-MI	M3,5-4h	10	10 IP
	ST-40120-UX	M4,0-5h	11	15 IP