


## ФРЕЗЫ концевые конические твердосплавные

ТУ 25.73.40-063-36293294-2019

**Назначение:** фрезы предназначены для обработки штампов, пресс-форм из высокопрочных материалов, стального и чугунного литья, легких сплавов.

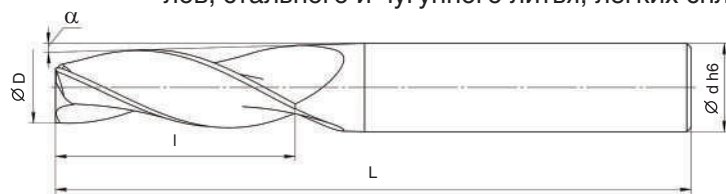

Обозначение	D	l	L	d	α°	z	наличие
<b>Короткая серия</b>							
K 645-2-6-39-C3-1.0	2	6	39	3	1°	2; 3	○
K 645-2-6-39-C3-2.0	2	6	39	3	2°	2; 3	○
K 645-2-6-39-C3-3.0	2	6	39	3	3°	2; 3	○
K 645-3-10-51-C4-1.0	3	10	51	4	1°	2; 3	○
K 645-3-10-51-C4-2.0	3	10	51	4	2°	2; 3	○
K 645-3-10-51-C5-3.0	3	10	51	5	3°	2; 3	○
K 645-4-15-51-C5-1.0	4	15	51	5	1°	2; 3; 4	○
K 645-4-15-51-C5-2.0	4	15	51	5	2°	2; 3; 4	○
K 645-4-15-51-C6-3.0	4	15	51	6	3°	2; 3; 4	○
K 645-6-20-61-C7-1.0	6	20	61	7	1°	2; 3; 4	○
K 645-6-20-64-C8-2.0	6	20	64	8	2°	2; 3; 4	○
K 645-6-20-64-C8-3.0	6	20	64	8	3°	2; 3; 4	○
K 645-8-25-68-C9-1.0	8	25	68	9	1°	2; 3; 4	○
K 645-8-25-73-C10-2.0	8	25	73	10	2°	2; 3; 4	○
K 645-8-25-74-C12-3.0	8	25	74	12	3°	2; 3; 4	○
K 645-10-30-74-C12-1.0	10	30	74	12	1°	2; 3; 4	○
K 645-10-30-74-C12-2.0	10	30	74	12	2°	2; 3; 4	○
K 645-10-30-84-C13-3.0	10	30	84	13	3°	2; 3; 4	○
K 645-12-35-84-C14-1.0	12	35	84	14	1°	2; 3; 4	○
K 645-12-35-83-C16-2.0	12	35	83	16	2°	2; 3; 4	○
K 645-12-35-83-C16-3.0	12	35	83	16	3°	2; 3; 4	○
K 645-14-40-83-C16-1.0	14	40	83	16	1°	2; 3; 4	○
K 645-14-40-85-C18-2.0	14	40	85	18	2°	2; 3; 4	○
K 645-14-40-85-C18-3.0	14	40	85	18	3°	2; 3; 4	○
<b>Длинная серия</b>							
K 646-6-20-80-C7-1.0	6	20	80	7	1°	2; 3; 4	○
K 646-6-20-80-C8-2.0	6	20	80	8	2°	2; 3; 4	○
K 646-6-20-80-C8-3.0	6	20	80	8	3°	2; 3; 4	○
K 646-8-25-80-C9-1.0	8	25	80	9	1°	2; 3; 4	○
K 646-8-25-89-C10-2.0	8	25	89	10	2°	2; 3; 4	○
K 646-8-25-84-C12-3.0	8	25	84	12	3°	2; 3; 4	○
K 646-10-30-84-C12-1.0	10	30	84	12	1°	2; 3; 4	○
K 646-10-30-100-C12-2.0	10	30	100	12	2°	2; 3; 4	○
K 646-10-30-100-C13-3.0	10	30	100	13	3°	2; 3; 4	○
K 646-12-35-100-C14-1.0	12	35	100	14	1°	2; 3; 4	○
K 646-12-35-100-C16-2.0	12	35	100	16	2°	2; 3; 4	○
K 646-12-35-100-C16-3.0	12	35	100	16	3°	2; 3; 4	○
K 646-14-40-100-C16-1.0	14	40	100	16	1°	2; 3; 4	○
K 646-14-40-100-C18-2.0	14	40	100	18	2°	2; 3; 4	○
K 646-14-40-100-C18-3.0	14	40	100	18	3°	2; 3; 4	○
<b>Группа применения</b>							
P	M	K	N	S	H		
■	□	■	■	□	□		
<p><b>Пример заказа:</b> Фреза твердосплавная K 646-12-35-100-C16-2.0 Z4 5 шт.</p> <p>● – складская продукция    ○ – под заказ</p>							